


DynaRound Hatch Guard

AVAILABLE THROUGH
TREMCO
ROOFING & BUILDING MAINTENANCE



Self-closing gate prevents accidental entry.

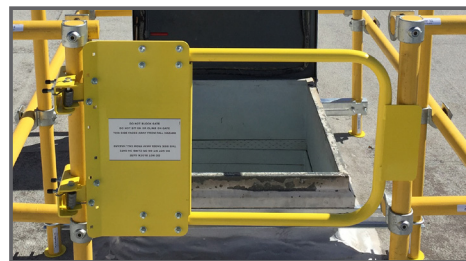

Width adjustable to allow for hatch size variations.



Unique compression fit design. No drilling!



Rugged hinges allow gate tension adjustment.

All Rooftop entry/exit points must be protected. The DynaRound Hatch Guard provides a non-penetrating, affordable solution. With easy setup, our hatch protection system can be used for both temporary and permanent solutions. The adjustable, self-closing gate prevents accidental entrance.

The DynaRound Hatch Guard is designed to install quickly. The unique snap in place rails allow typical installation in less than 60 minutes with 2 people.

The DynaRound Hatch Guard mounts directly to the roof hatch with a compression fit design. No drilling necessary means rooftop water integrity is not compromised. Multiple sizes are available to fit almost any hatch. Yellow or gray FRP posts and guardrails with galvanized fittings and self closing gate ensure a long service life.

SPECIFICATIONS

Safety Ratings

OSHA Requirements:

- 1926.501(b)(4)
- 1910.28(b)
- 1926.502(b)
- 1910.29(b)

CAL/OSHA Requirements:

- 3209
- 3212

IBC 2015 Requirements:

- 1015.3
- 1015.7
- 1015.4.4
- 1607.8.1
- 1607.8.1.1
- 1607.8.1.2

National Building Code of Canada 2015

- 4.1.5.14
- 9.8.8.2

Benefits

- Fast Installation
- Rugged Design
- Compression Fit
- No Cutting or Drilling
- Self-Closing Gate
- FRP Posts and Rails
- No Roof Penetration
- Adjustable - Fits Nearly Any Roof Hatch
- Custom Configurations Available


Measurements

- Rail Heights
 - Top Rail Height: 42"
 - Mid Rail Height: 20"
- Multiple Sizes Available
 - 30-36" x 30-54"
 - 42-48" x 42-60"
 - 30-36" x 96-114"
- Custom Sizes Available



ADDITIONAL SAFETY SOLUTIONS

AVAILABLE THROUGH
TREMCO
ROOFING & BUILDING MAINTENANCE




FRP DYNARAIL® SAFETY LADDERS

DynaRail® Safety Ladder Systems combine a corrosion resistant, low maintenance design to ensure a long life cycle. Ladder rungs include heavily serrated flutes for slip resistant footholds that are easy on the hands while ensuring safety. Our system is designed and manufactured to be easily installed with no guesswork involved. Components are lightweight and easy to fabricate, which saves you on labor and equipment. UV inhibitors in the resin along with a secondary UV coating maximize protection from the effects of UV weathering. The Dynarail safety ladder system meets or exceeds all OSHA requirements.




DYNAROUND HATCH GUARD

DynaRound Hatch Guard provides a non-penetrating guard solution for safe entry and exit through roof access hatches. The adjustable self-closing gate prevents accidental entrance when hatch is open. The DynaRound Hatch Guard mounts directly to the roof hatch with a compression fit design so no drilling is necessary, which means the rooftop waterproofing system is not compromised.



DYNAROUND RG™ (ROOF GUARD)

DynaRound RG™ Roof Guard ballasted rooftop guardrail system is designed for safety and fall protection on rooftop applications. Each system is made of durable, corrosion-resistant fiberglass reinforced plastic (FRP) composite uprights and non-FRP counterbalance weights and connector components. DynaRound RG provides the utmost in safety by protecting against injuries or death from accidental falls from the roof. This system meets all applicable safety standards in the U.S. and Canada to protect individuals on rooftop surfaces.



DYNAROUND RG SLIMLINE™ (ROOF GUARD)

Fibergrate's ballasted rooftop guardrail system, DynaRound RG Slimline™, provides safety and fall protection on rooftop applications with fewer counterbalance bases than DynaRound RG. Similar to our DynaRound RG system, each Slimline system is made of durable, weather-resistant fiberglass reinforced plastic (FRP) composite uprights and rails, galvanized steel base weights, and galvanized connector components. This system meets applicable safety standards in the U.S. and Canada to protect people working at heights.



DYNAWEIGHT FALL PREVENTION SYSTEM

DynaWeight Fall Protection System is the perfect solution for fall protection when circumstances require non-penetrating versatility. This system is tested and approved for use on flat rooftop surfaces (single ply, BUR, concrete, modified bitumen membranes, AlphaGuard™ BIO, AlphaGuard™ MT/MTS, and AlphaGuard™ PUMA), with a maximum incline of 5 degrees. It provides tie off options for two people if used for fall restraint or one person for fall arrest; sets up quickly and is easy to move. The DynaWeight Fall Protection System is corrosion resistant and meets all applicable safety standards in the U.S. and Canada to protect individuals on rooftop surfaces.



DYNAROUND WARNING LINES

DynaRound Warning Lines available in a heavy and light duty design. Our heavy-duty warning line systems can be used as a permanent warning system with heavy-duty galvanized base plates, plastic coated steel cable, and plastic pennants. The heavy-duty stanchions and bases are designed to withstand years of use. The standard system includes three stanchions, three bases, and 100' feet of plastic coated steel cable with flags. Our light duty warning line system can be used as a temporary warning system. This system includes three folding stanchions, 100' of nylon flagged line. Both systems meet all applicable safety standards in the U.S. and Canada to protect individuals on rooftop surfaces.



CORVEX® MOLDED GRATING WITH RUBBER FEET

Molded Walkway Grating is made with a unique Corvex resin system that outperforms many competitive fiberglass and metal products. Our molded grating is corrosion resistant, lightweight, slip resistant, and easy to install. Specially designed rubber feet can be added to molded grating, elevating it 1/2" above the surface, offering an economical raised walkway solution for use around maintenance equipment, machines, wet areas, and rooftop walkway areas.



CROSSOVERS

Our FRP Crossovers are pre-engineered and both corrosion- and slip-resistant. Available in a variety of heights that address most standard clearances, these Crossovers provide a cost-effective, safe solution over many rooftop obstructions. Crossover systems create a safe working environment, are lightweight, easy to install and designed to meet all applicable safety standards in the U.S. and Canada.

All Fibergrate Roof Top Safety Solutions are available through Tremco Roofing and Building Maintenance



Phone: 800-852-6013



www.tremcoroofing.com



SafetySolutions@tremcoinc.com

©2018 Fibergrate Composite Structures Inc. - DynaRound SlimLine - Product Data Sheet-11/18-1.0

Fibergrate Composite Structures believes the information contained here to be true and accurate. Fibergrate makes no warranty, expressed or implied based on this literature and assumes no responsibility for consequential or incidental damages in the use of these products and systems described, including any warranty of merchantability or fitness. Information contained here is for evaluation only.

TREMCO
ROOFING & BUILDING MAINTENANCE