


DYNAROUND RG (ROOF GUARD) SLIMLINE™

Fibergrate's new ballasted rooftop guardrail system, DynaRound RG Slimline™, provides safety and fall protection on rooftop applications. While our RG system utilizes counter balance bases, the Slimline systems uses both counterbalance bases in addition to circular galvanized bases with less interference. Similar to our DynaRound RG system, each Slimline system is made of durable, weather-resistant fiberglass reinforced plastic (FRP) composite uprights and rails, galvanized steel base weights, and galvanized connector components. This system meets applicable safety standards in the U.S. and Canada to protect people working at heights.



BENEFITS OF FRP

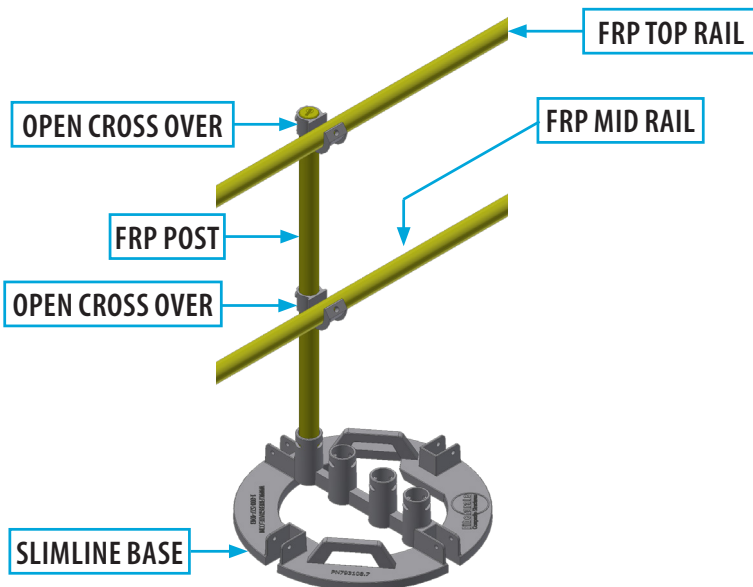

Corrosion Resistant: Fibergrate® fiberglass products are known for their ability to provide corrosion resistance in the harshest environments.



Lightweight: Fibergrate FRP products lessen impact on rooftop installations, reduce installation time, can eliminate the need for heavy lifting equipment, and reduce shipping costs.



Low Maintenance: The corrosion resistant properties of FRP are easy to clean and reduce or eliminate the need for sandblasting, scraping and painting.



Long Service Life: Fiberglass products provide outstanding durability and corrosion resistance in demanding applications, providing improved product life over traditional materials.



Electrically & Thermally Non Conductive: Fiberglass is electrically non conductive for safety and has low thermal conductivity - resulting in a more comfortable product when physical contact occurs.



UV Resistant: The FRP rails, post, and outriggers have additional factory applied coating suitable for daily UV exposure - further reducing the low cost of maintenance.

DynaRound RG Slimline provides the utmost in safety by protecting against injuries or death from accidental falls from the roof. The weighted base system means there is no drilling into the roof to attach the system. This eliminates any damage to the roof that could result from the drilling, including potential sources of leaks.



SPECIFICATIONS

Safety Ratings

OSHA Requirements:

- 1926.501(b)(1)
- 1910.28(b)(1)
- 1926.502(b)
- 1910.29(b)

CAL/OSHA Requirements:

- 3210
- 1620
- 3212
- 3209

IBC 2018 Requirements:

- 1015.3
- 1607.8.1 - (Modified system required)
- 1015.4.4
- 1607.8.1.1
- 1015.7
- 1607.8.1.2

Materials of Construction

Rails, posts, and outriggers:

- VEFR (Vinyl ester resin system with a flame spread of 25 or less for dependable resistance to both acidic and alkaline environments)

Fittings and Base Weights:

- Galvanized, cast iron connectors with set screws
- Protective, durable rubber pads on parts that contact roof surface

Size

- 1.9" O.D. Pultruded Round Tube


Colors

Yellow with UV Coating

Light Gray with UV Coating


PRODUCT DATA SHEET

SYSTEM COMPONENTS

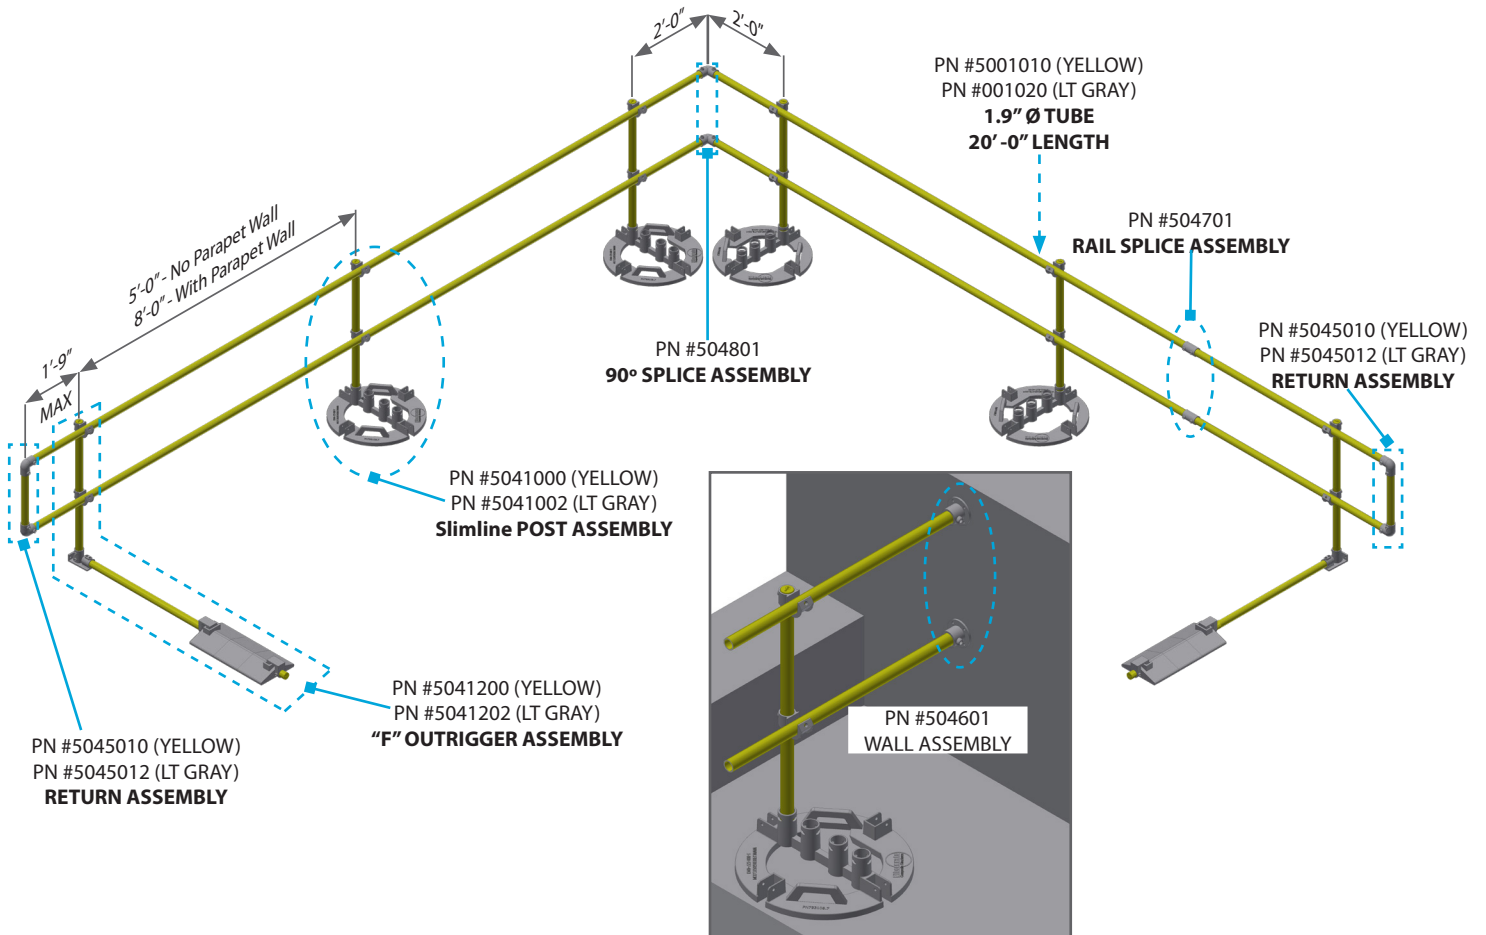


TYPICAL SPACING FOR ASSEMBLIES

RETURN CONDITION

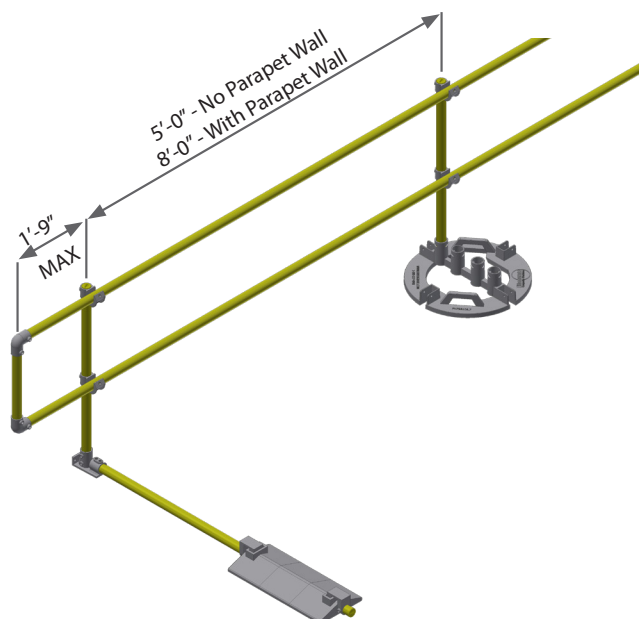

KICKER ASSEMBLY

(A kicker assembly can be used as an alternative to the standard "F" outrigger.)

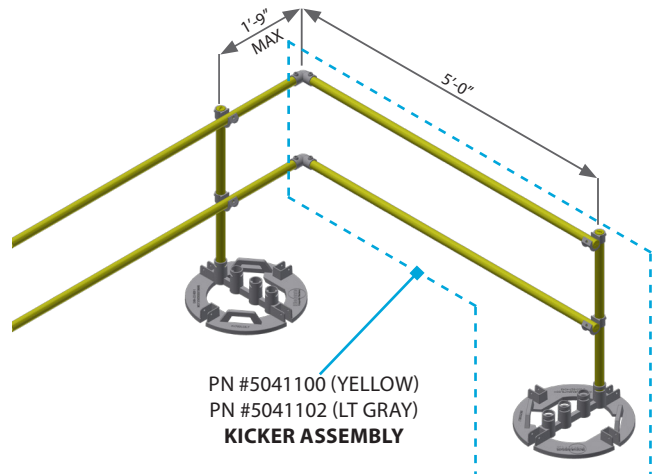

All assembly details can be found on the next page.

PRODUCT DATA SHEET

ASSEMBLY DETAILS

DynaRound SL Post Assembly, Yellow
ITEM #5041000
Weight = 97 lbs

DESCRIPTION	QTY	PN #
DynaRound SL Post - YL	1	5041610
Open Cross Over	2	793201
Lock Pin	1	793108.2
DynaRound SL Base	1	793108.7

DynaRound SL Post Assembly, LT GRAY
ITEM #5041002
Weight = 97 lbs

DESCRIPTION	QTY	PN #
DynaRound SL Post - GR	1	5041612
Open Cross Over	2	793201
Lock Pin	1	793108.2
DynaRound SL Base	1	793108.7

DynaRound SL Kicker Assembly, Yellow
ITEM #5041100
Weight = 110 lbs

DESCRIPTION	QTY	PN #
DynaRound SL Post - YL	1	5041610
Open Cross Over	2	793201
Lock Pin	1	793108.2
DynaRound SL Base	1	793108.7
Two Way Elbow	2	793125
DynaRound SL Kicker Rail - YL	2	5041710

DynaRound SL Kicker Assembly, LT GRAY
ITEM #5041102
Weight = 110 lbs

DESCRIPTION	QTY	PN #
DynaRound SL Post - LG	1	5041612
Open Cross Over	2	793201
Lock Pin	1	793108.2
DynaRound SL Base	1	793108.7
Two Way Elbow	2	793125
DynaRound SL Kicker Rail - LG	2	5041712

DynaRound SL 'F' Outrigger Assy, Yellow
ITEM #5041200
Weight = 148 lbs

DESCRIPTION	QTY	PN #
DynaRound RG Post - YL	1	5040010
Open Cross Over	2	793201
Slipper	1	793206
Roof	3	793208
Special Hook	2	793207
F Outrigger (L = 70") - YL	1	5046110

DynaRound SL 'F' Outrigger Assy, LT GRAY
ITEM #5041202
Weight = 148 lbs

DESCRIPTION	QTY	PN #
DynaRound RG Post - LG	1	5040012
Open Cross Over	2	793201
Slipper	1	793206
Roof	3	793208
Special Hook	2	793207
F Outrigger (L = 70") - LG	1	5046112

Swivel Elbow Assembly
ITEM #504802
Weight = 4 lbs

DESCRIPTION	QTY	PN #
Swivel Elbow	2	793126

WALL ASSEMBLY
ITEM #504601
Weight = 4 lbs

DESCRIPTION	QTY	PN #
Base Flange	2	793131

RAIL SPLICE ASSEMBLY
ITEM #504701
Weight = 3 lbs

DESCRIPTION	QTY	PN #
Sleeve Joint	2	793149

90° SPLICE ASSEMBLY
ITEM #504801
Weight = 4 lbs



DESCRIPTION	QTY	PN #
Two Way Elbow	2	793125

RETURN ASSEMBLY, Yellow
ITEM #5045010
Weight = 6 lbs


DESCRIPTION	QTY	PN #
Return (Length: 21-1/16")	1	5045110
Two Way Elbow	2	793125

RETURN ASSEMBLY, LT GRAY
ITEM #5045012
Weight = 6 lbs


DESCRIPTION	QTY	PN #
Return (Length: 21-1/16")	1	5045112
Two Way Elbow	2	793125

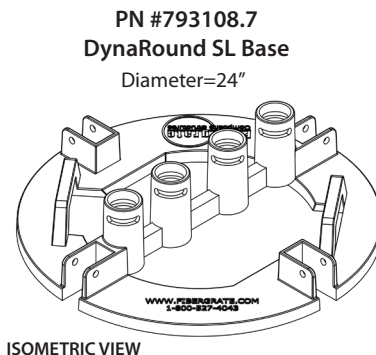


PN # 5041610/5041612
DYNAROUND SL POST
(LENGTH =41-1/4")

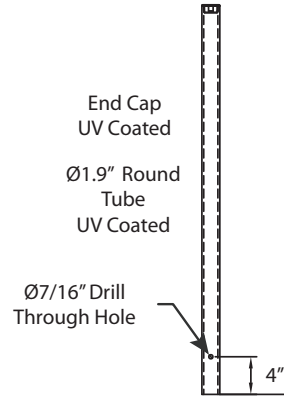

PN #793201
OPEN CROSS OVER




PN #793207
SPECIAL HOOK*




*Shown upside down


PN #793125
TWO WAY ELBOW




PN #793206
SLIPPER




PN #793108.2
LOCK PIN




PN #793131
BASE FLANGE




PN #5045110
RETURN (Length = 21-1/16")



PN #793126
SWIVEL ELBOW



PN #793149
SLEEVE JOINT



PN #5046110/5046112
F OUTRIGGER
(LENGTH=66")

