


# Tremco Skylight Guard Hail Screen

## Installation Manual


PLEASE NOTE: HAIL SCREENS ARE AVAILABLE IN SINGLE SCREEN AND DUAL SCREEN KITS DEPENDING ON THE SIZE OF THE TREMCO SKYLIGHT GUARD THEY ARE BEING USED ON.

### ASSEMBLY

1. After the Tremco Skylight Guard is completely installed, place the Hail Screen on top of the Skylight Guard cage and center it so equal lengths (approximately 5") extend past the end of the Skylight Guard cage. Dual Screen Kits will be placed together at the center and extend equally on ends.
2. Clamp Hail Screen to Skylight Guard with supplied hardware placing SST Clips 4" in from ends. Location of Clips is not critical but should be placed near the side bends of the Skylight Guard. Be sure bottom clip rests in the Skylight Guard 1/4" wire.
3. Tighten 1/4" screws and Nylock Nuts until snug.

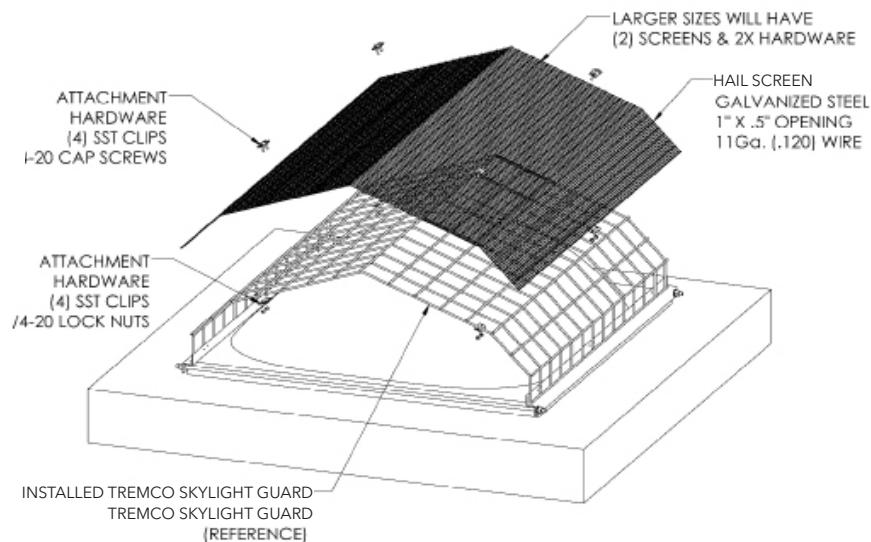


### SKYLIGHT GUARD HAIL SCREEN

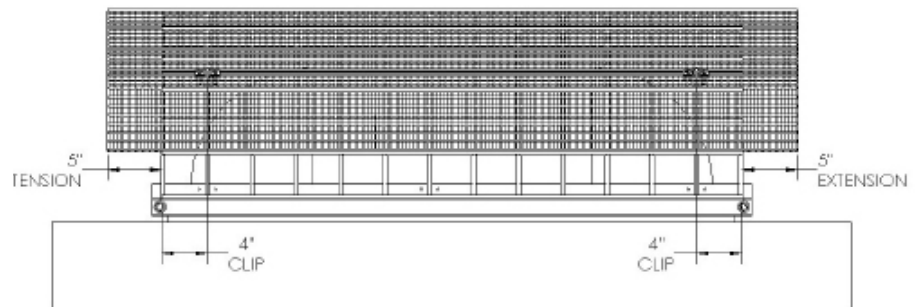

SIDE VIEW

# Tremco Skylight Guard Hail Screen

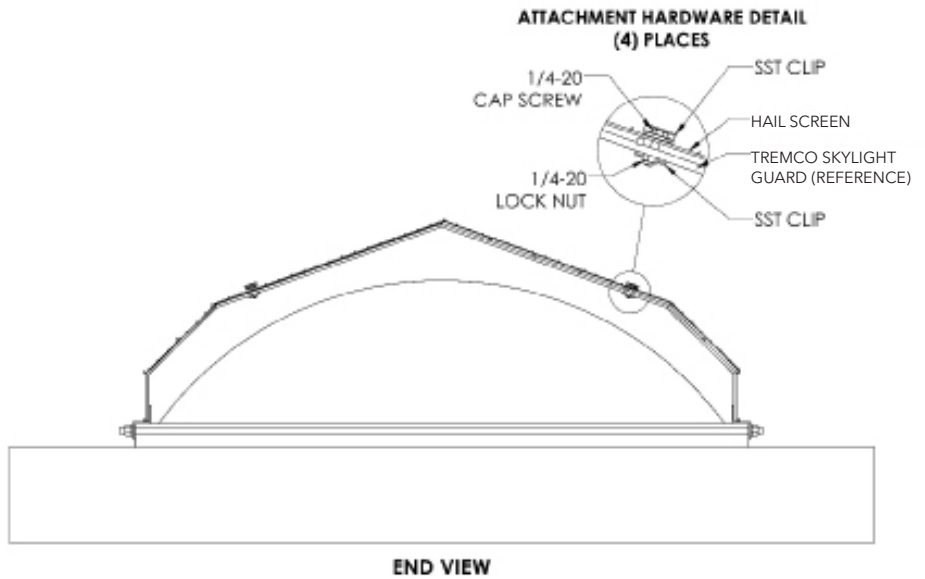

## ANNUAL INSPECTION PROCEDURE

- Verify that all fasteners are tightened.
- Replace any missing fasteners.
- Inspect screen for damage. Replace if damage is found.